


SI-113 CRAZY 4



The CRAZY 4, where legend begins, integrates 4 individual compact BEAM moving heads (same functions) in an UFO shape revolver with fast and precise 360° continuous PAN movement. Each head comes with a PHILIPS 189W 5R lamp, independent TILT adjustment and high definition 3° optic lens.

The fixtures offers a full complement of professional characteristics. It's applicable for large scale live concerts, TV productions, clubs, etc.

PHOTOMETRIC BEAM ANGLE DATA
(FC=LUX × 0.0929)

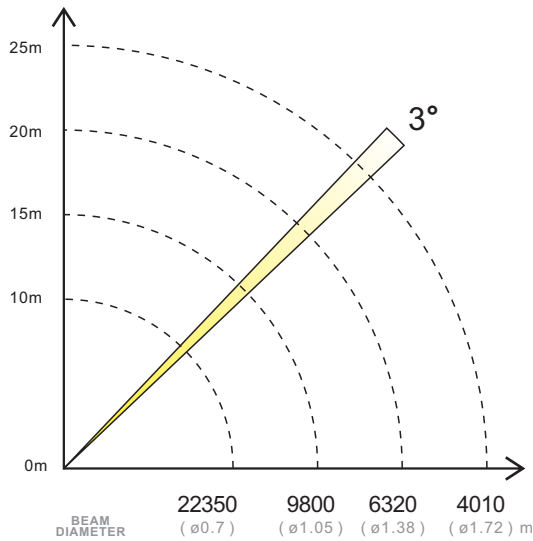

Features

- > 4*PHILIPS 189W 5R lamp
- > 2000 hours life span and low power consumption
- > 8/16 bit smooth and precise resolution for PAN/TILT movement
- > 360° continuous PAN and 180° TILT movement
- > PAN/TILT inversion available
- > Scan position memory, auto re-position after unexpected movement
- > Specific high precision glass optic system with 3° projection angle
- > Improved optics and flat beam field
- > A static gobo wheel with 17 gobos plus open and gobo shake
- > A color wheel with 14 colors plus open
- > Variable direction rainbow effect with speed adjustable
- > 2.5m to 30m linear electric focus
- > 8-Facet prism with variable speed and direction
- > 0-100% Smooth linear dimmer
- > 1~20T/sec high speed shutter/strobe effect with variable speed
- > Preset variable/random strobe and dimming pulse effect

- > 52/11 DMX channels USITT DMX-512 (vector mode included, color time and gobo time controllable from fast to slow)
- > DMX512, master-slave, and sound activated controllable or auto operation
- > 8 Built-in auto running programs
- > 6 Built-in macro functions
- > DMX recorder and edit function integrated
- > 2.4" TFT LCD display (320*240pix)
- > POWRECON connector IN
- > 3-Pin XLR connectors IN/OUT
- > Low noise fan cooling system
- > Constant temperature readout and management function
- > -20~45°C max ambient temperature
- > IP20 protection rating
- > 55dB at 3'dB rating
- > 1 Set specially designed hanging system
- > 2* Safety attachment points

Specifications

Input Voltage:	AC100-240V 50/60Hz
LED Quantities:	4*PHILIPS 189W 5R lamp
Control Signal:	DMX512, master-slave and sound activated or auto operation
Control Channel:	52/11 DMX channels USITT DMX-512
Power Consumption:	1200W
Dimensions:	555(D)*564(W)*545(H)mm
Net Weight:	54kg
Flight Case Dimensions:	620(D)*590(W)*860(H)mm
Flight Case Weight:	28KG
Gross Weight:	82kg (with case)

